

109290" 9T922260

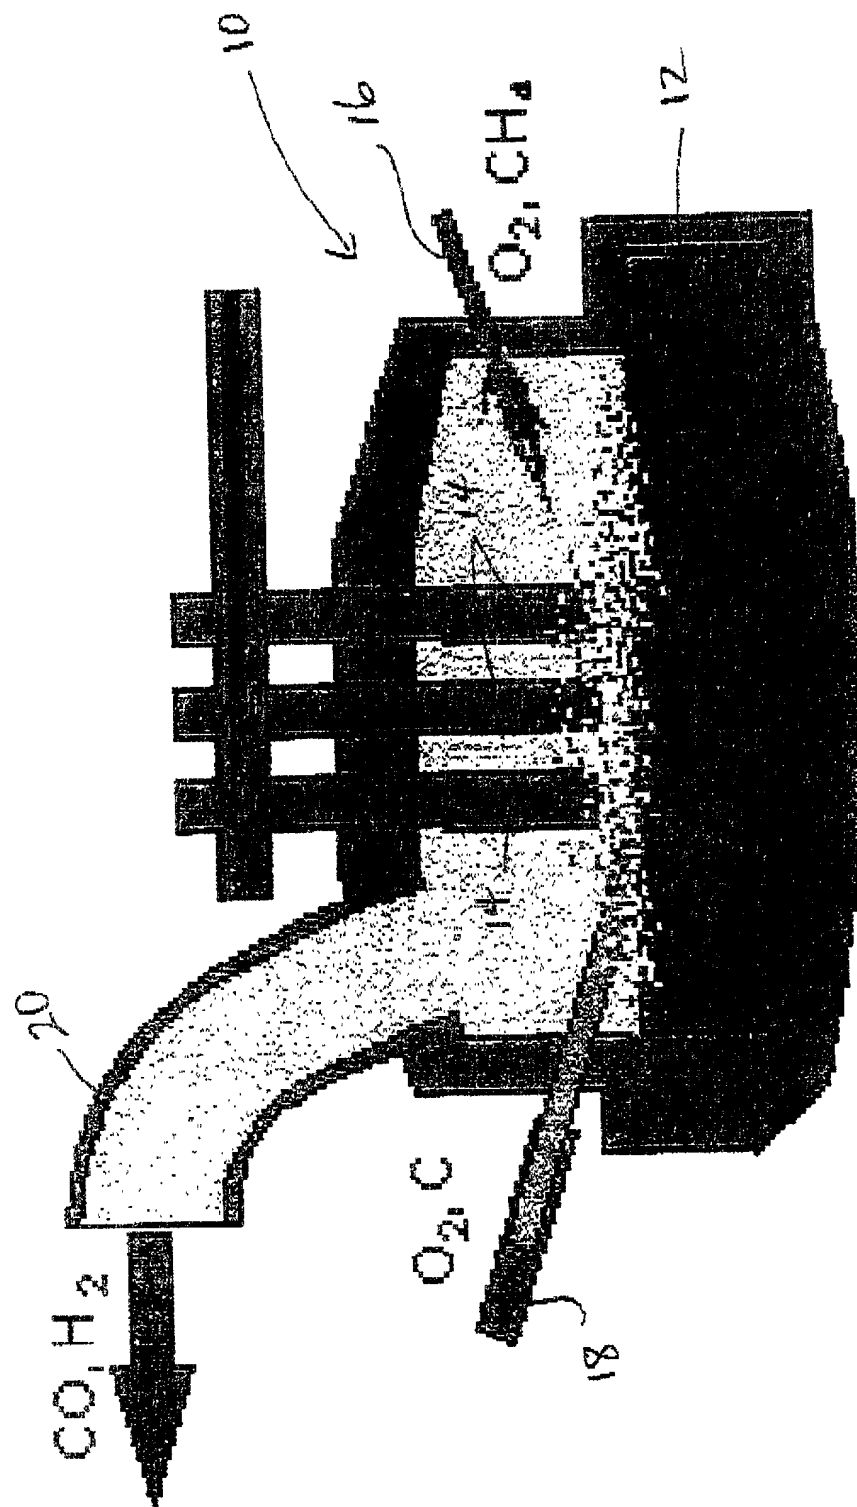


FIGURE 1

TD9290" 9T98860

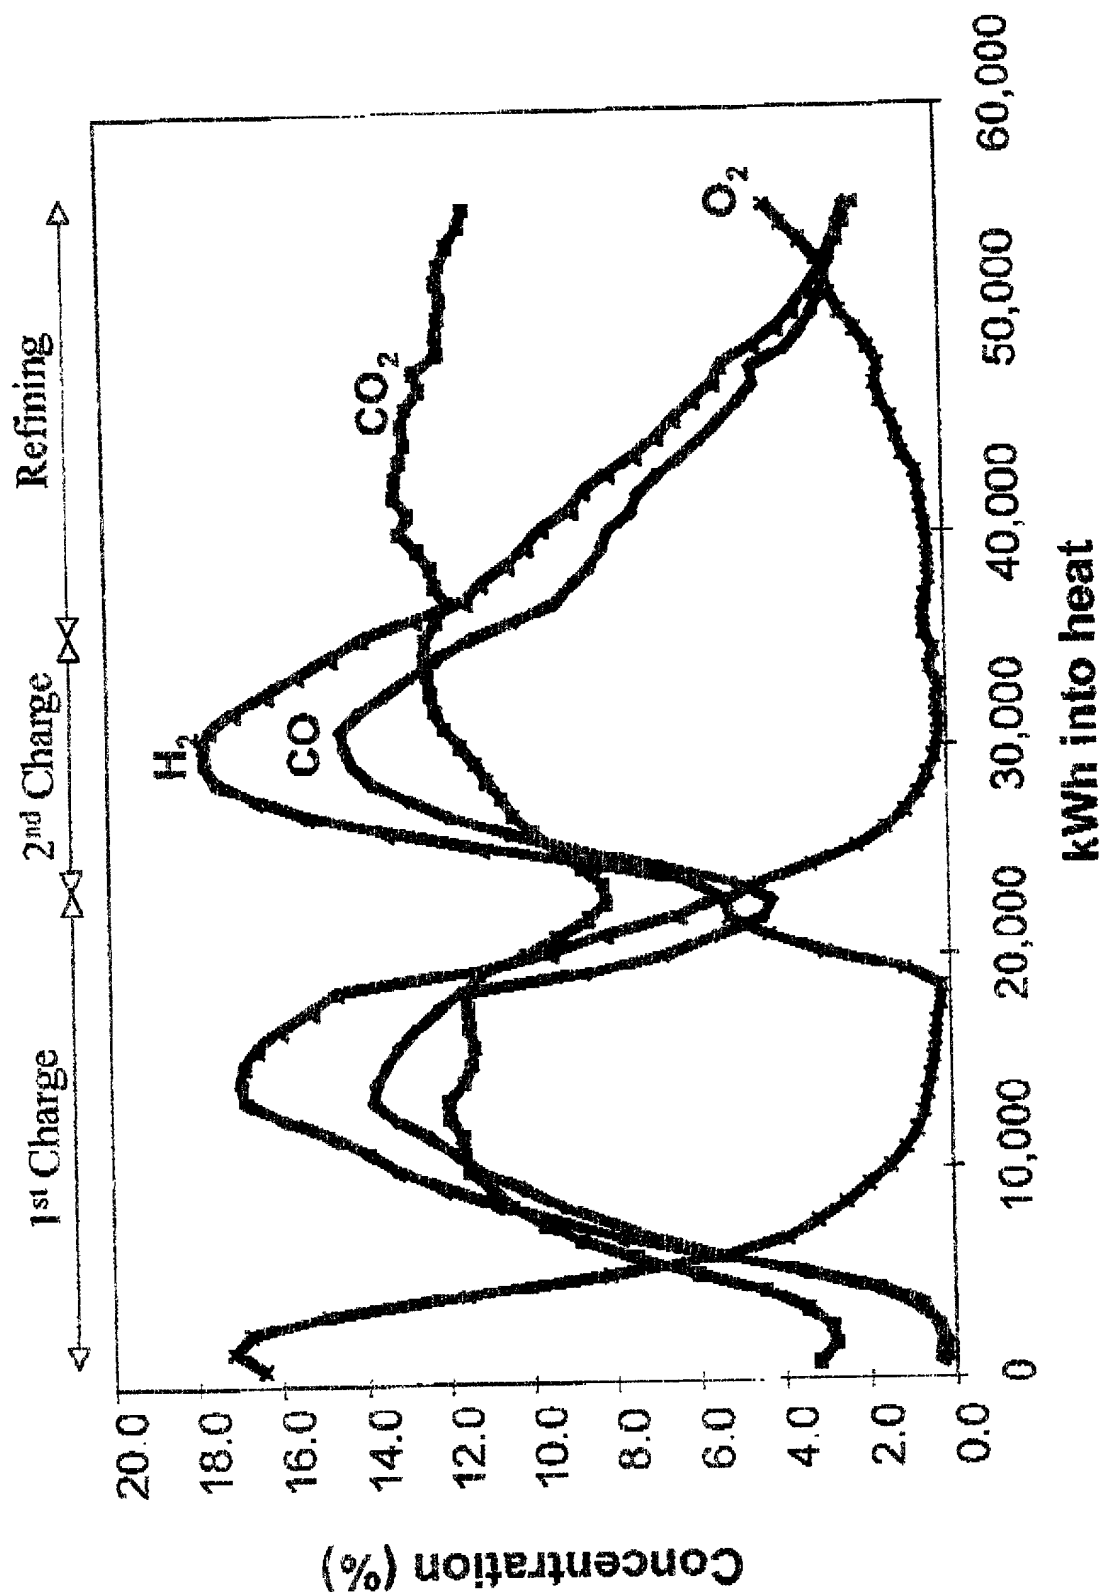


FIGURE 2

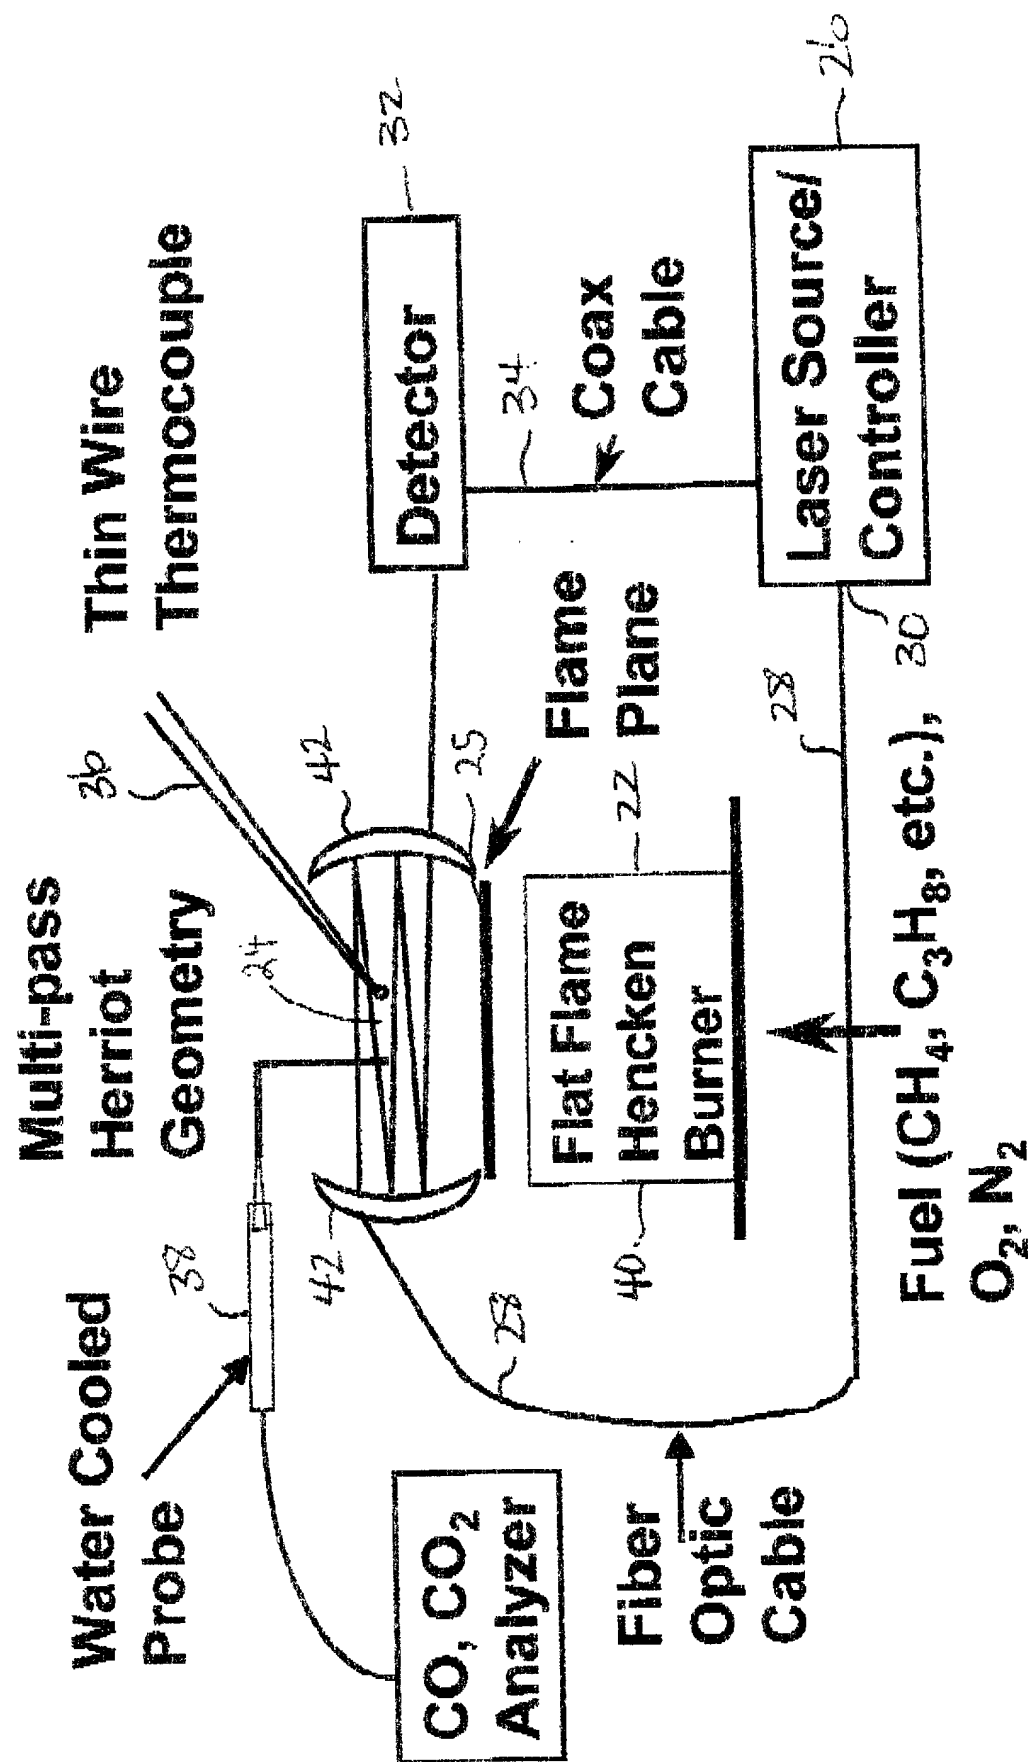


FIGURE 3

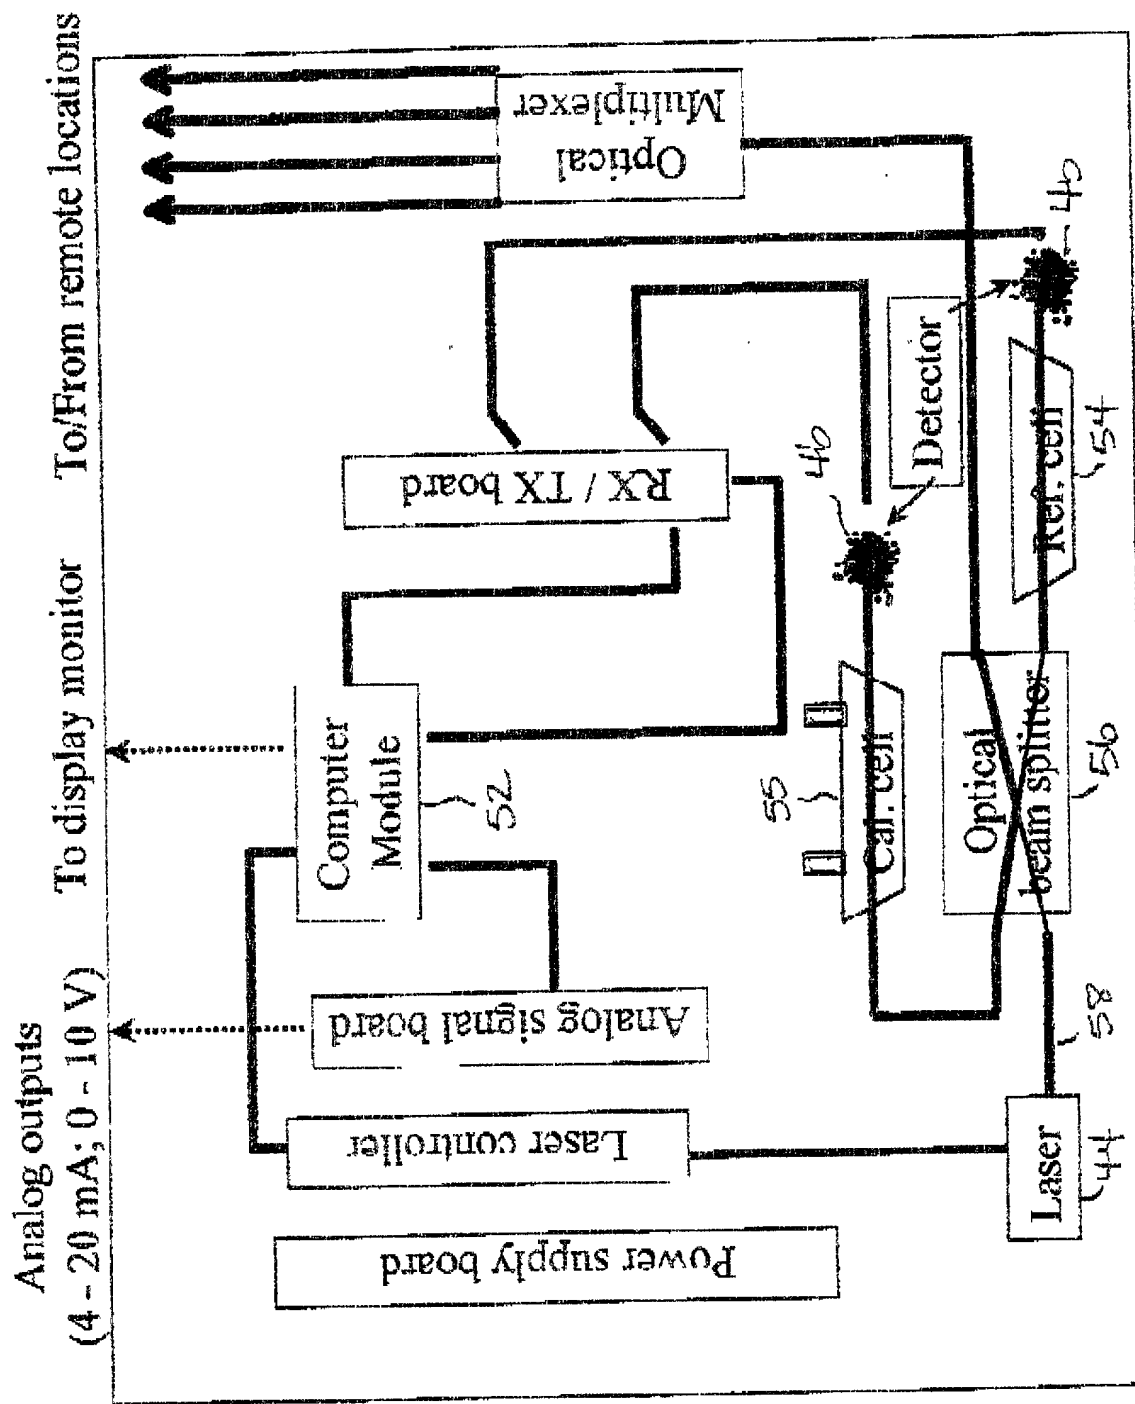


FIGURE 4

09220" 2132850

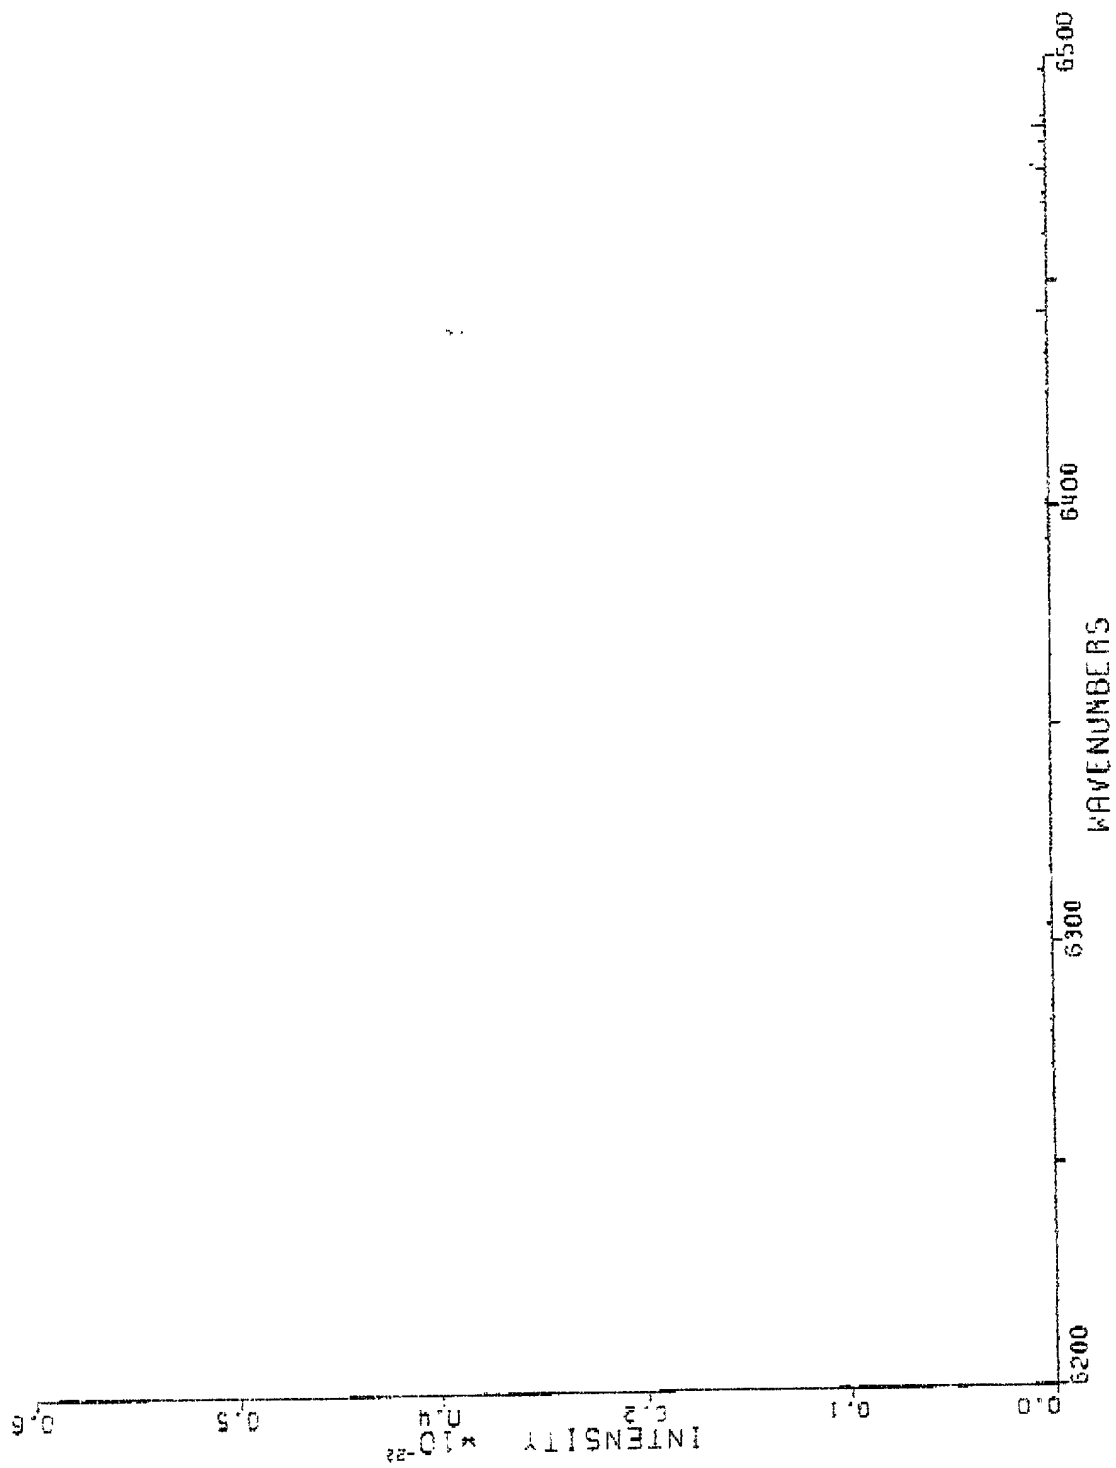


FIGURE 5

09290" 9T988860

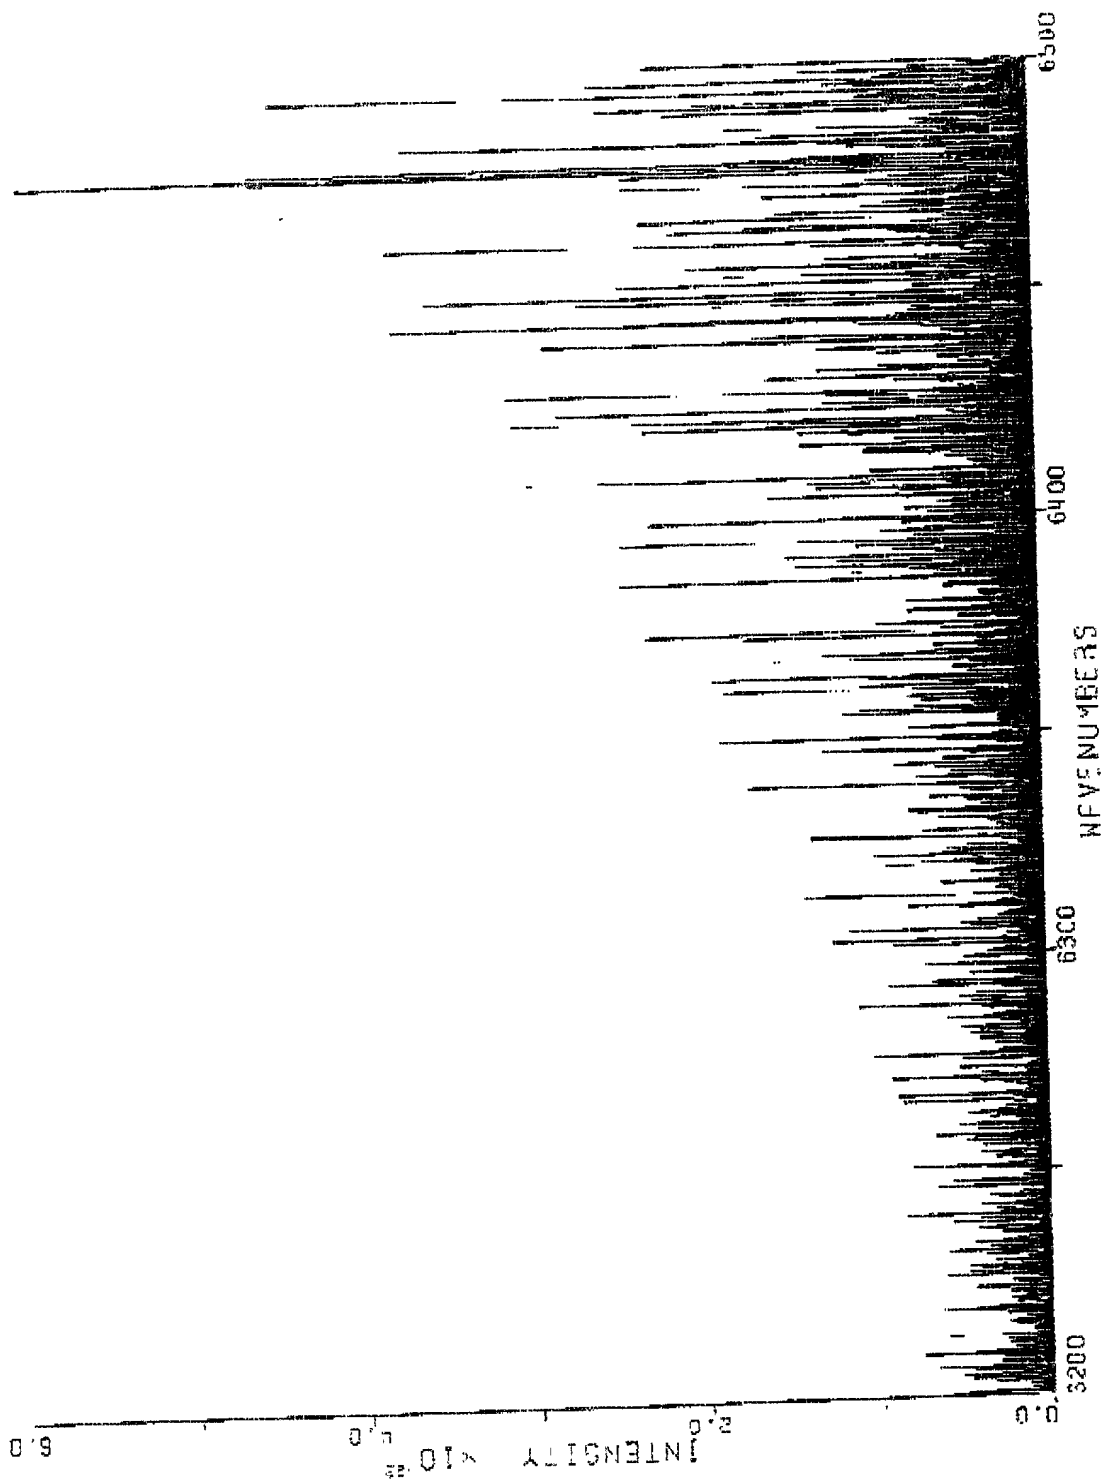


FIGURE 6

T0290" 0199960

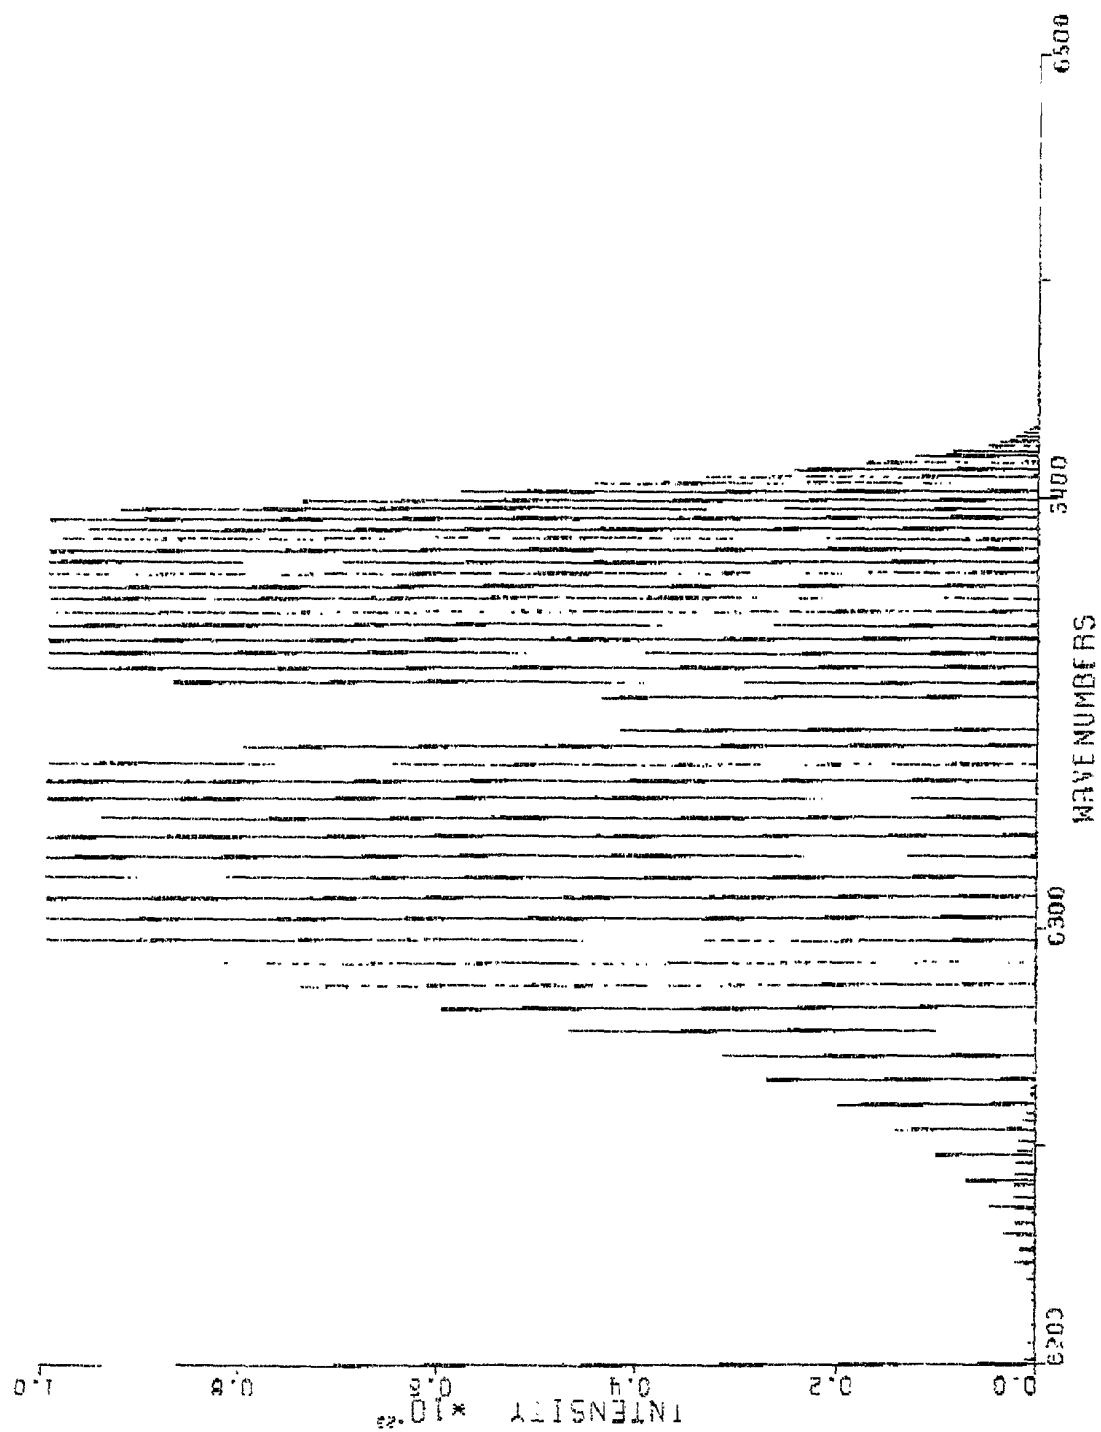


FIGURE 7

0988616 062601

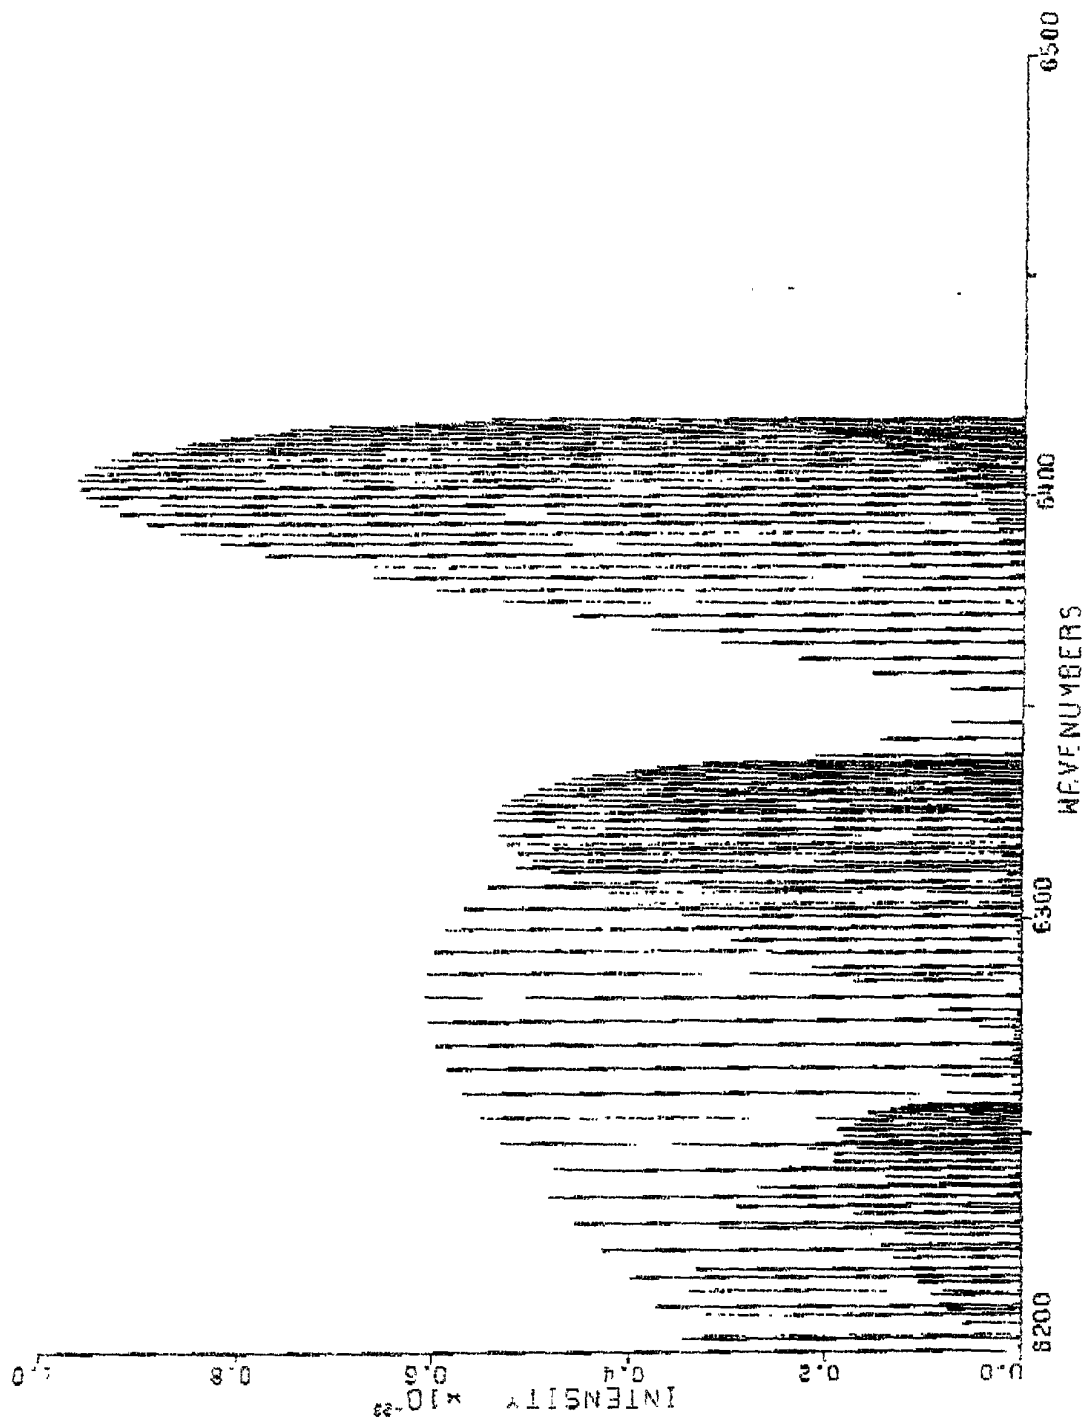


FIGURE 8

0988616 062601
T09290" 9T988660

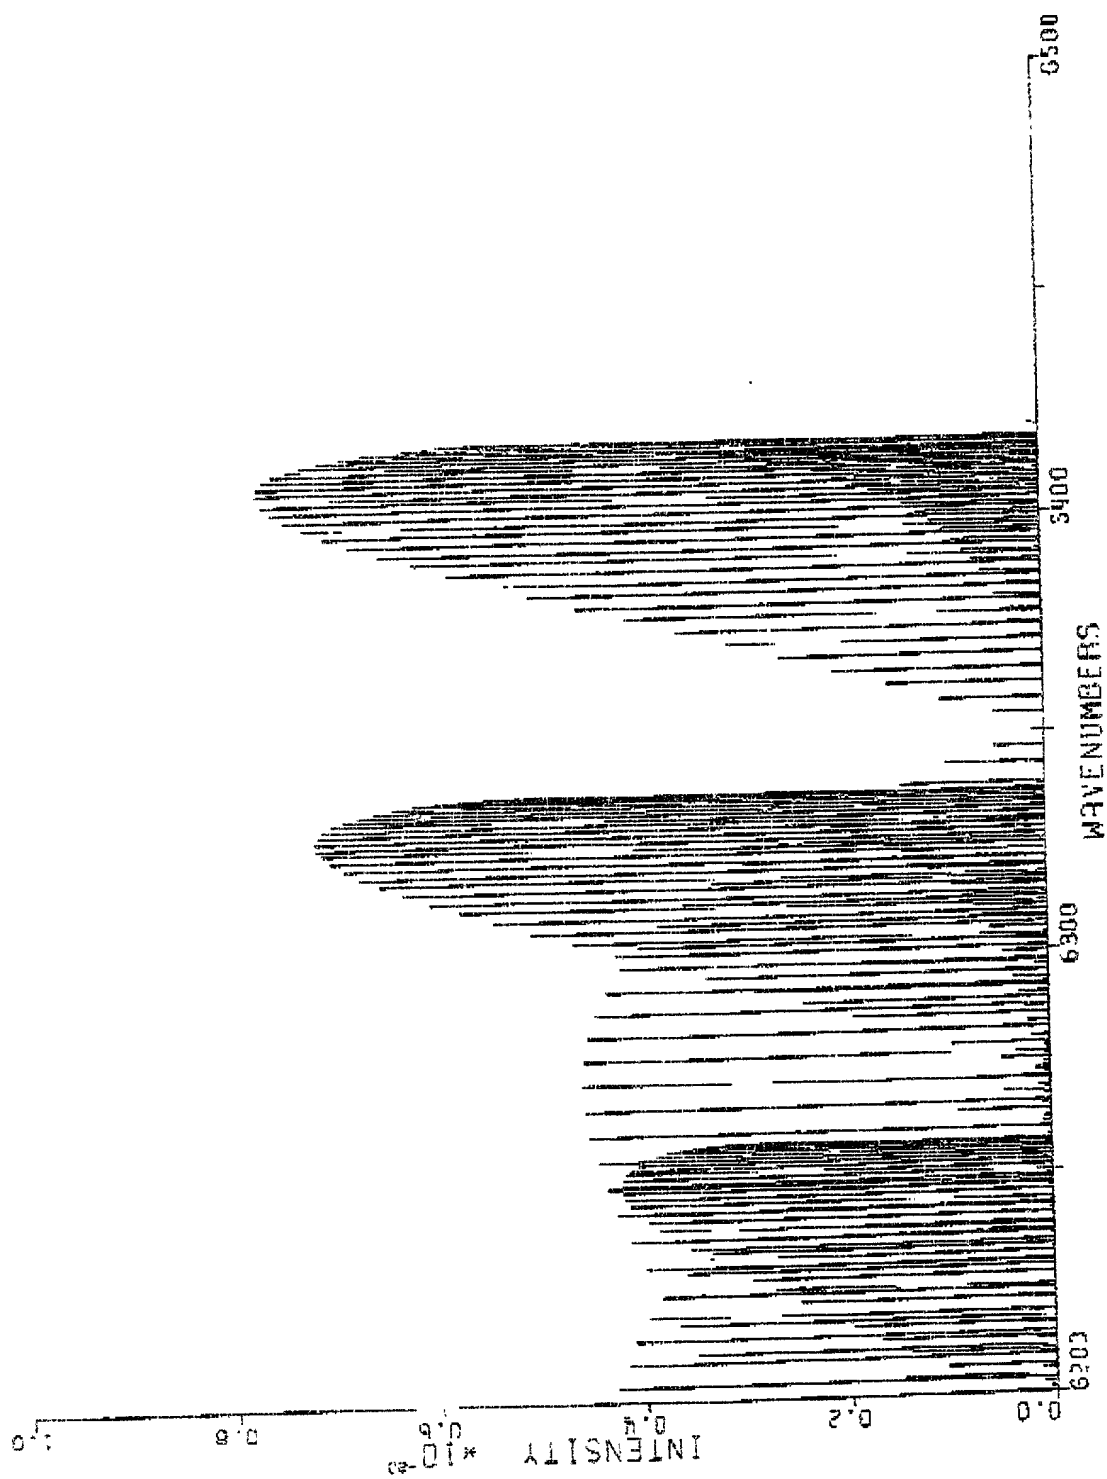


FIGURE 9

TO 9290" 9T 988860

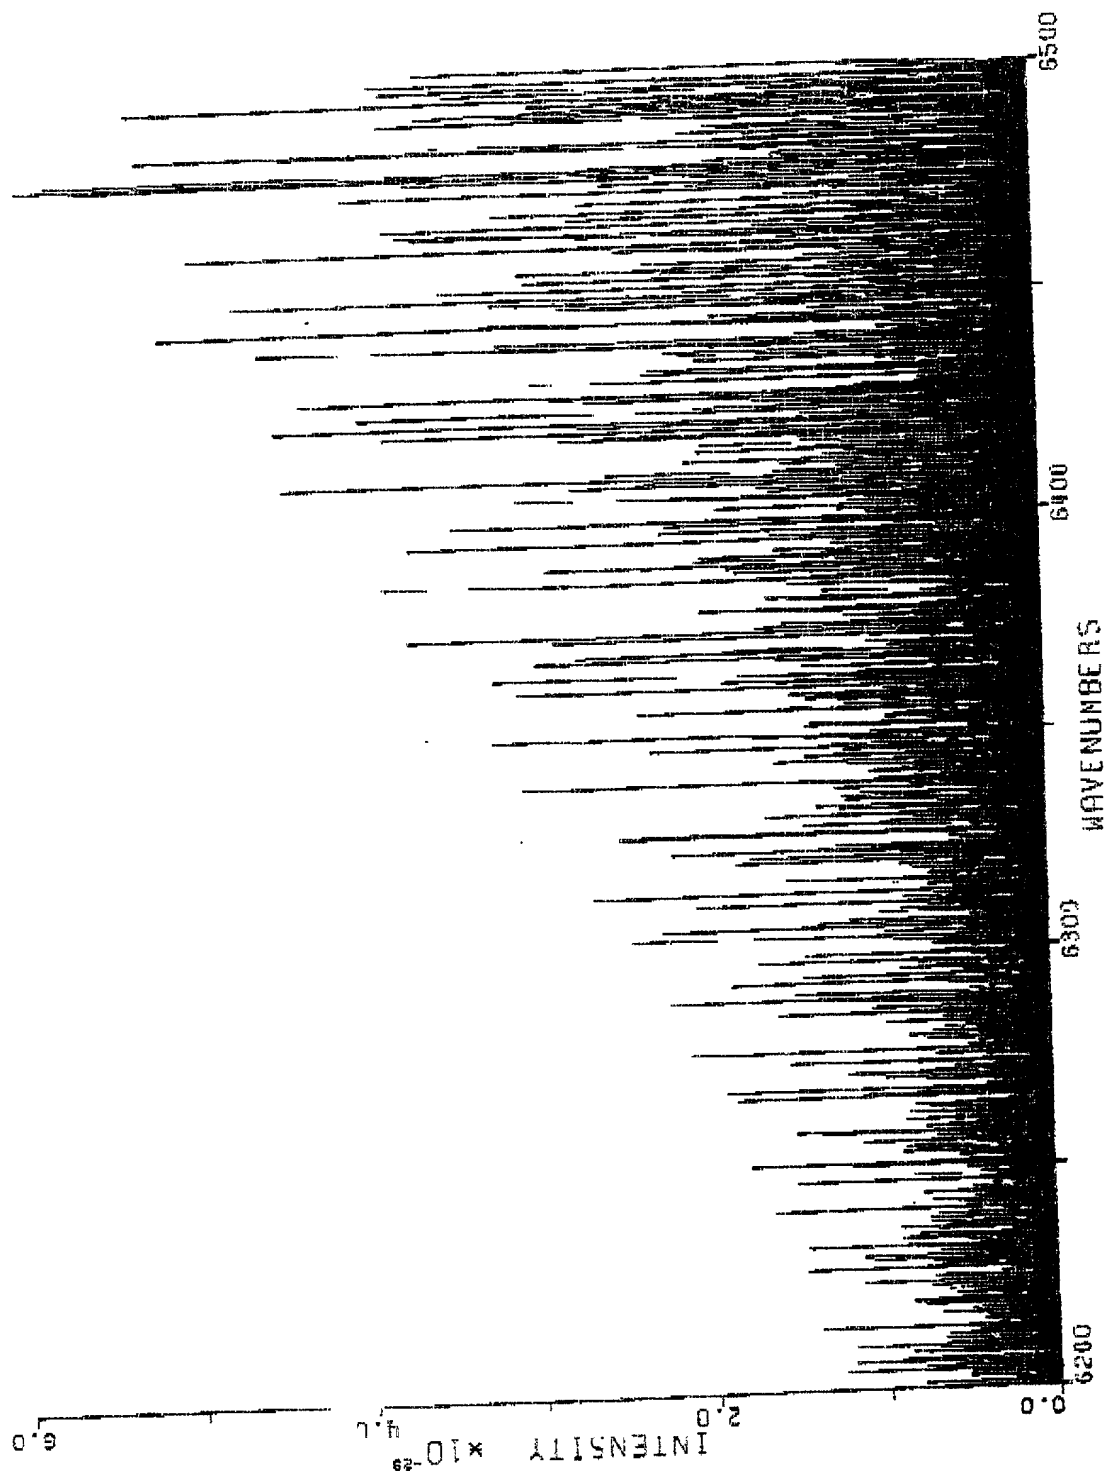


FIGURE 10

FO9290" 9T938860

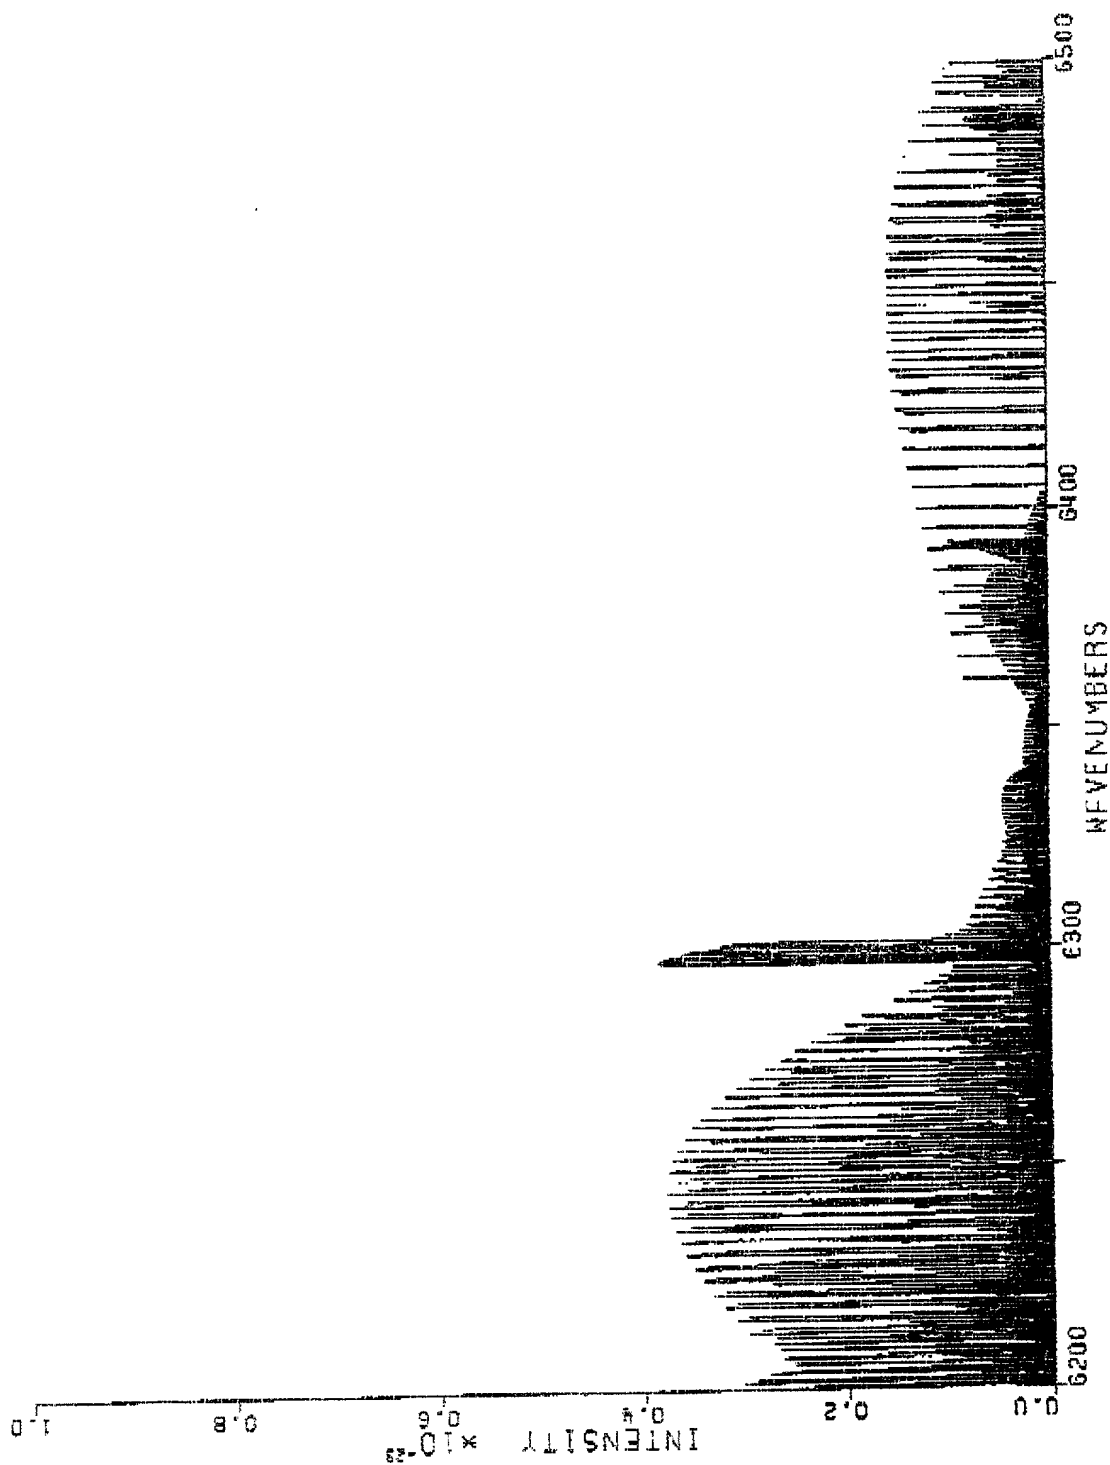


FIGURE 11

High Temperature (T_{sum} of about 1600K) WITH Power Correction

Signal Strength vs. Current for CH_4
CO Target Peak #1b Response: 3/2/00
Diode Temperature = 5°C; RF = -2.15 & Ramp = 4

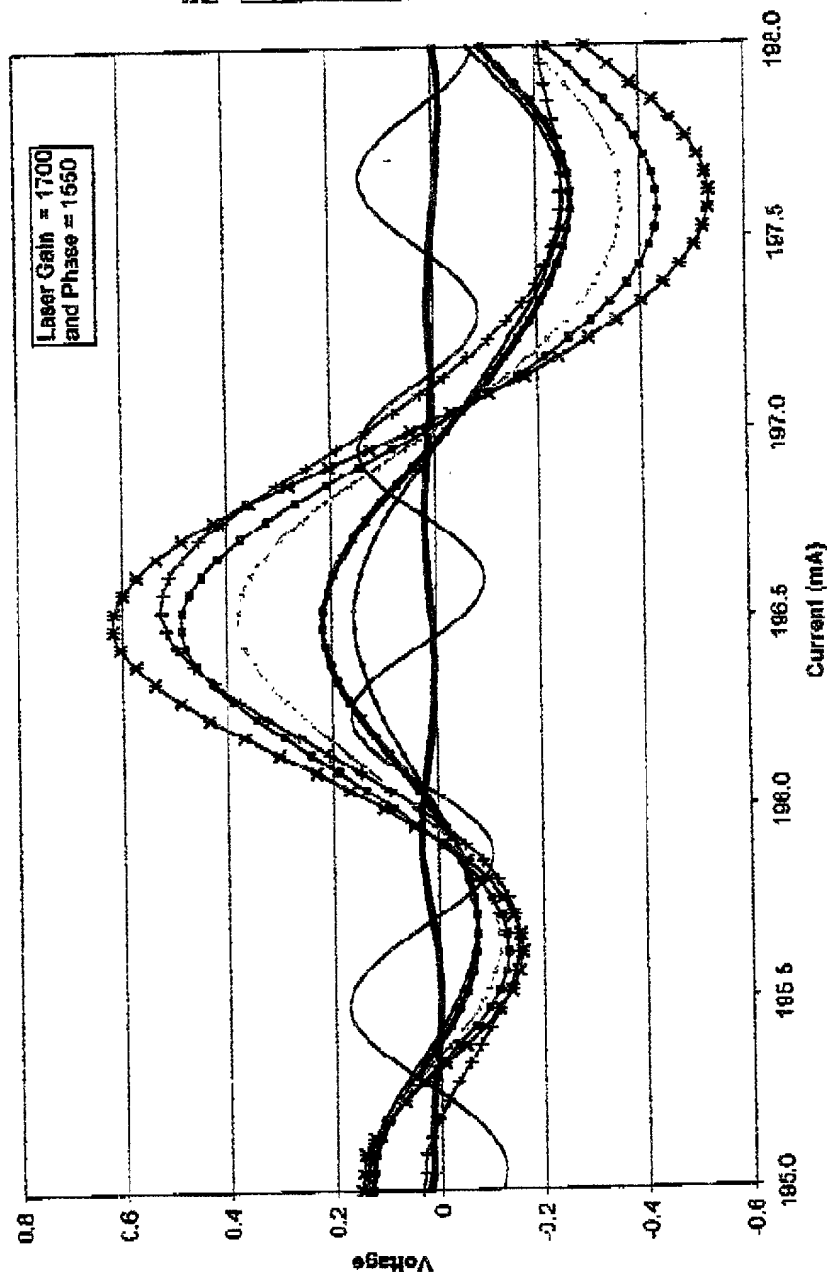


FIGURE 12

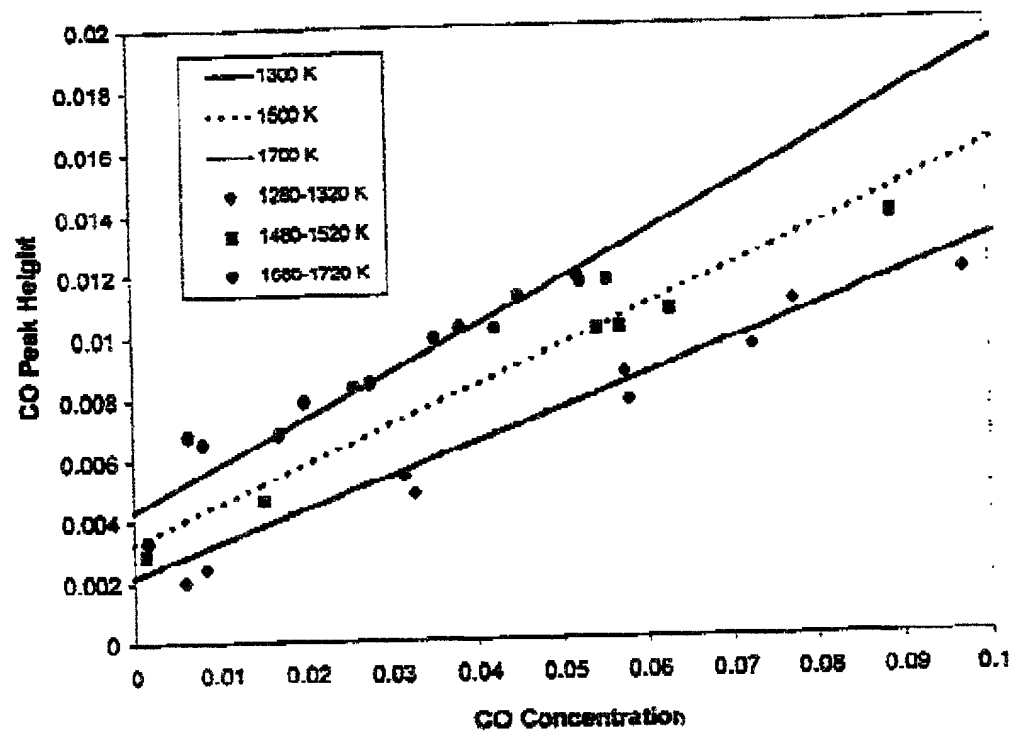


FIGURE 13

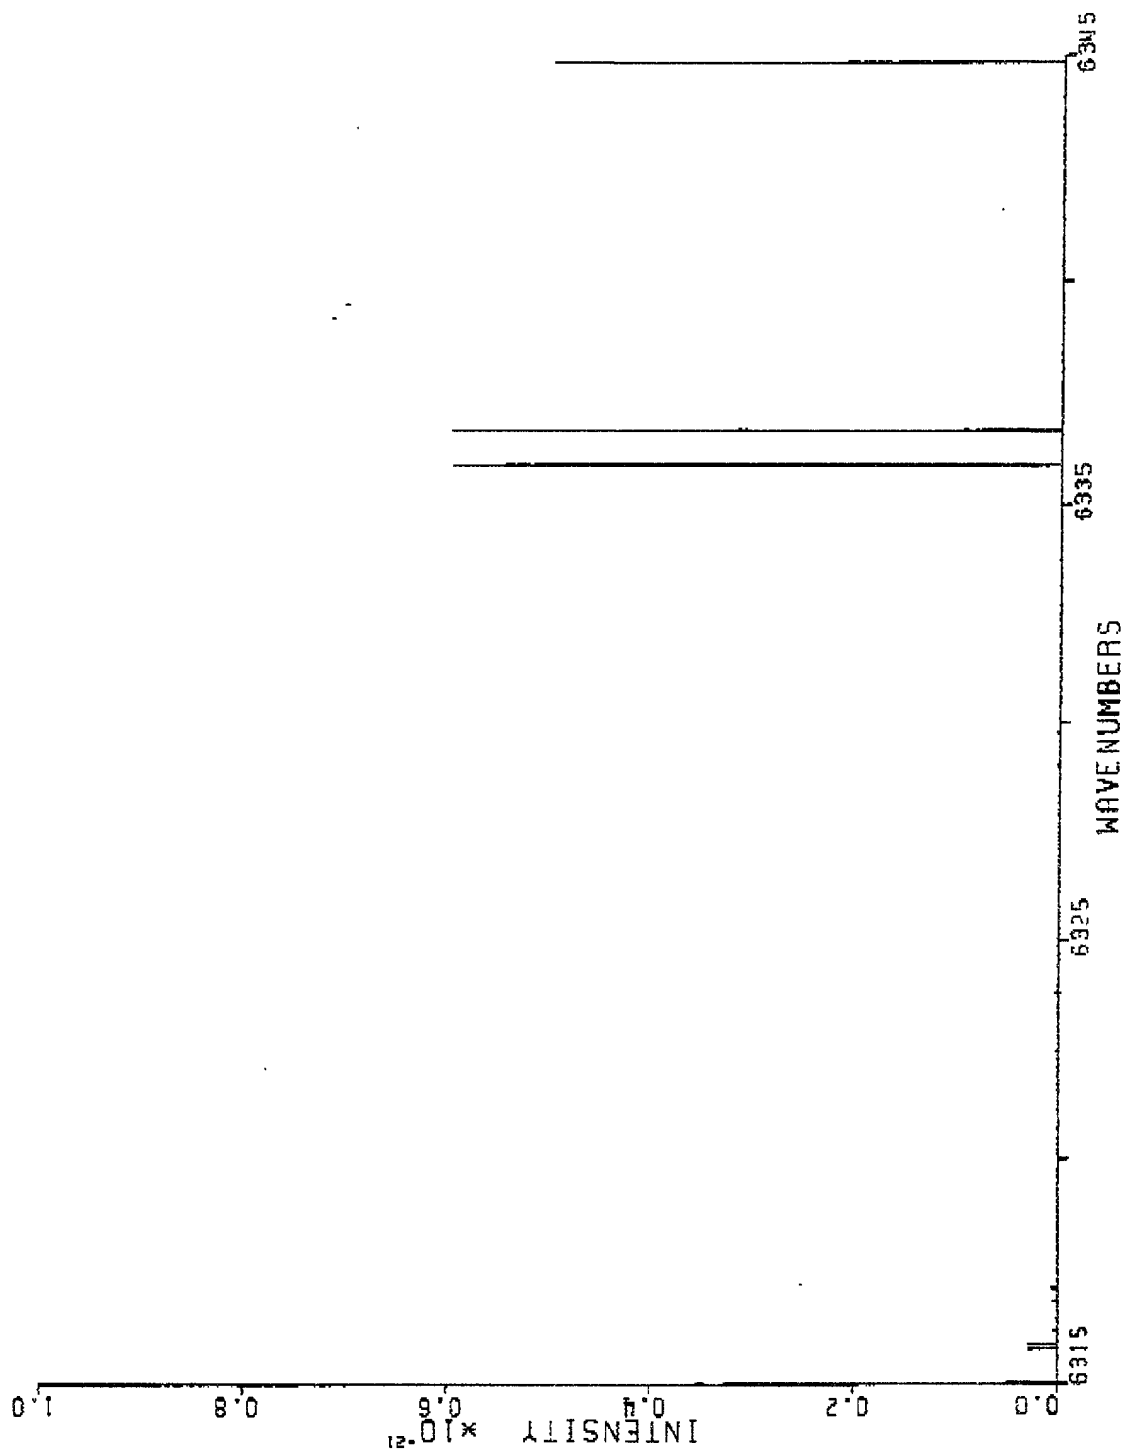


FIGURE 14

T09290" 9T933260

FIG. 15

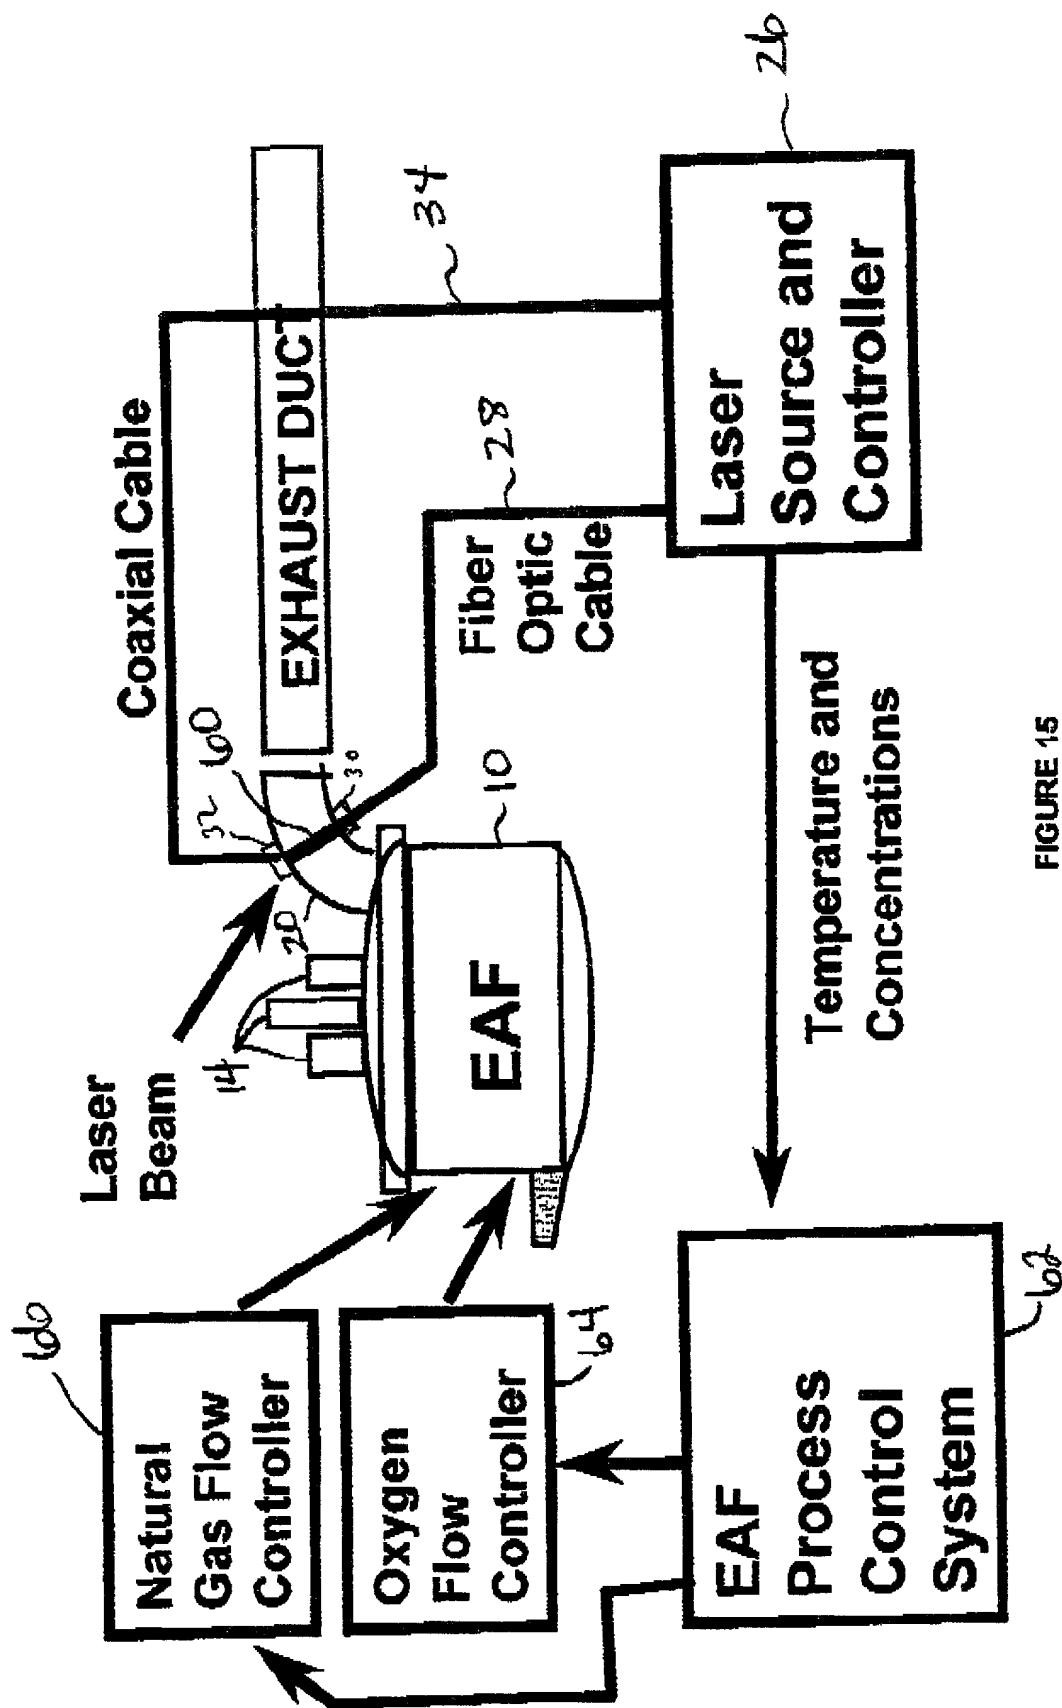


FIGURE 15

FIG. 15a

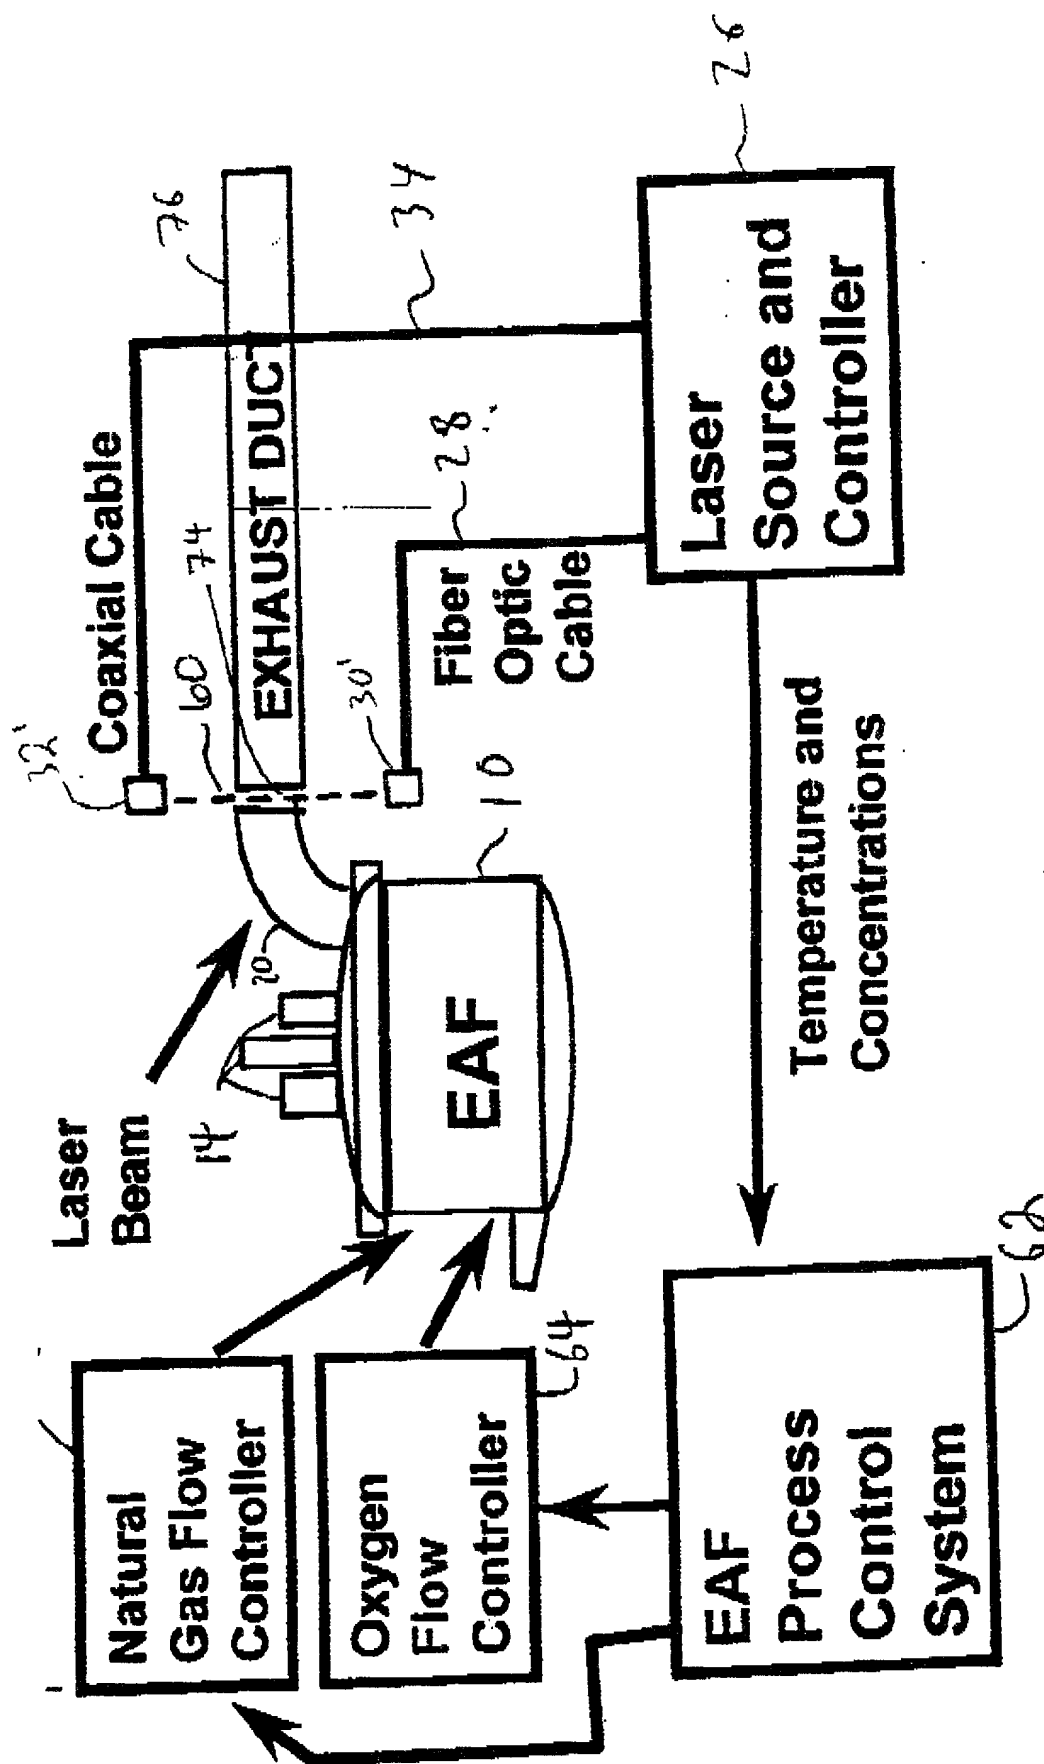


FIGURE 15a

FIG. 16

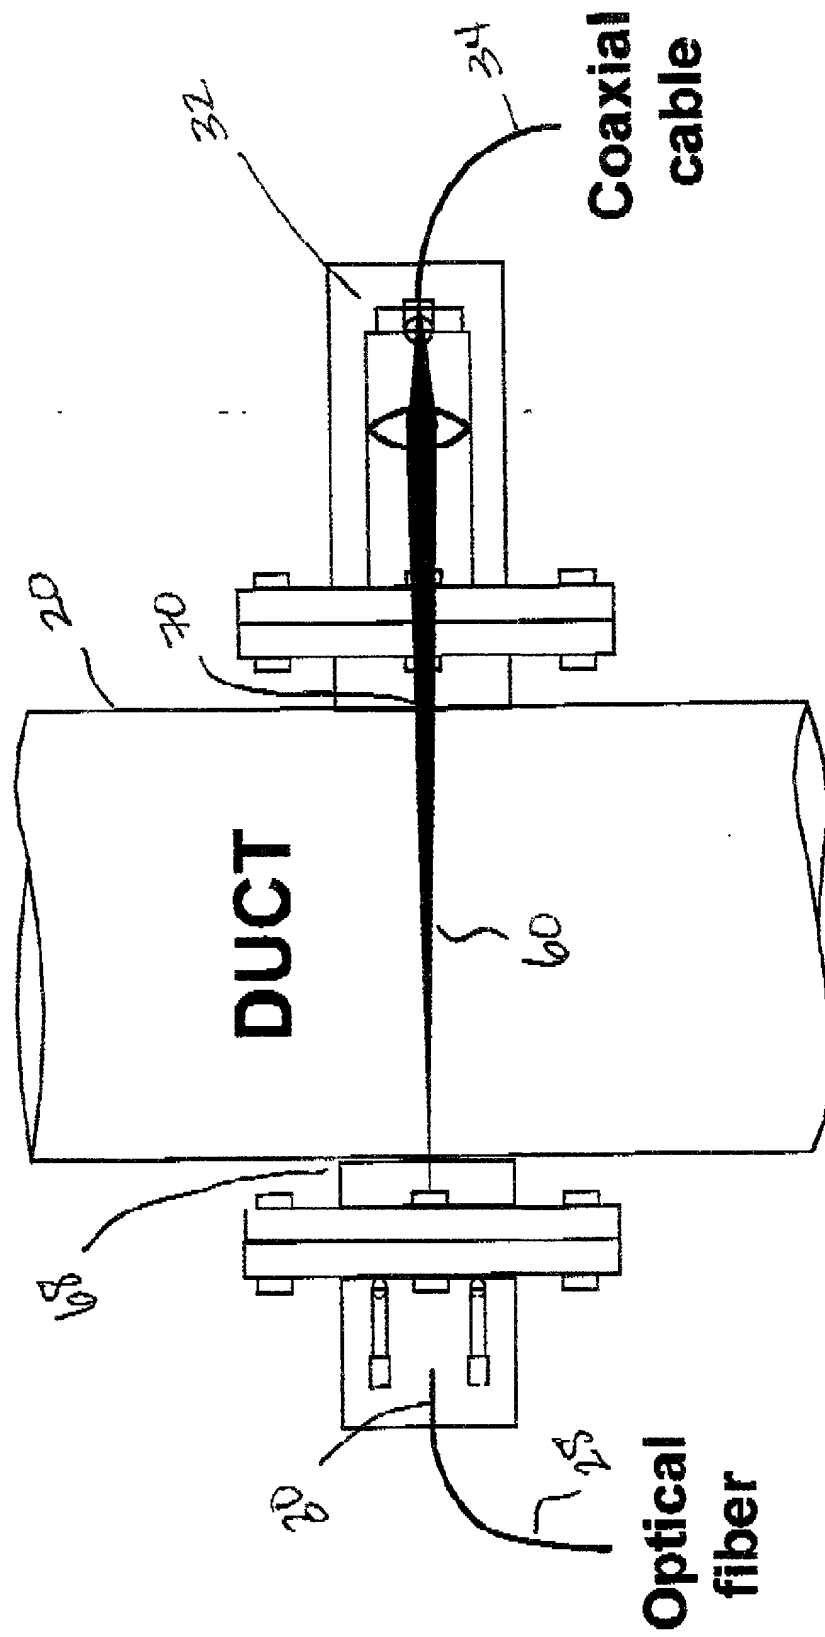


FIGURE 16

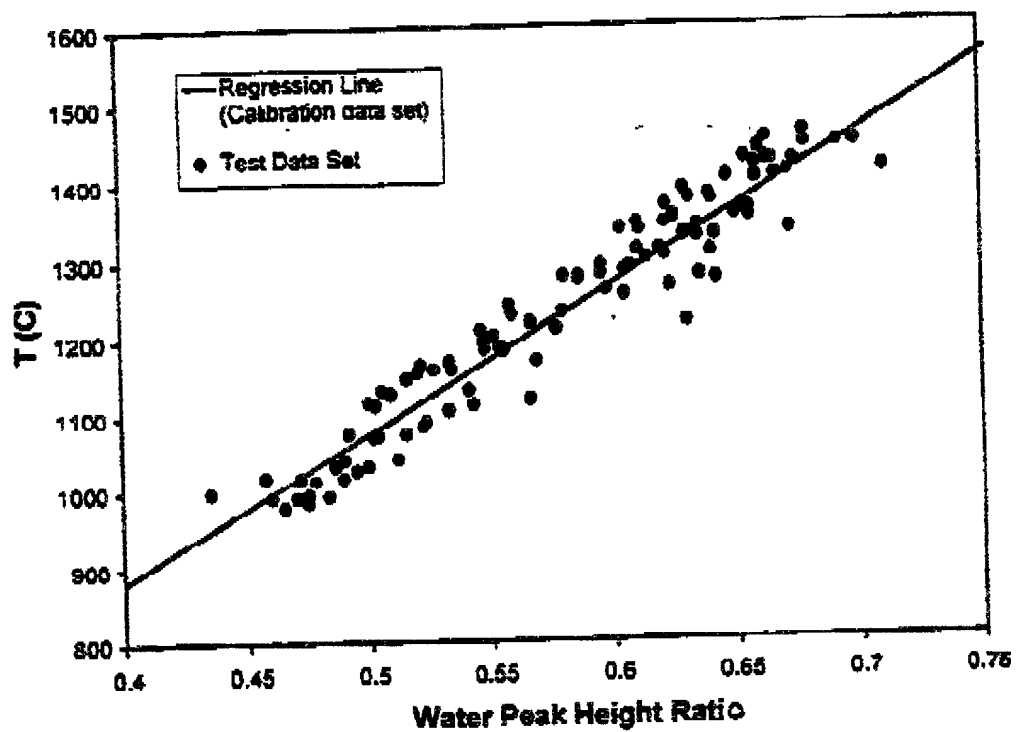


FIGURE 17

09250" ST988860

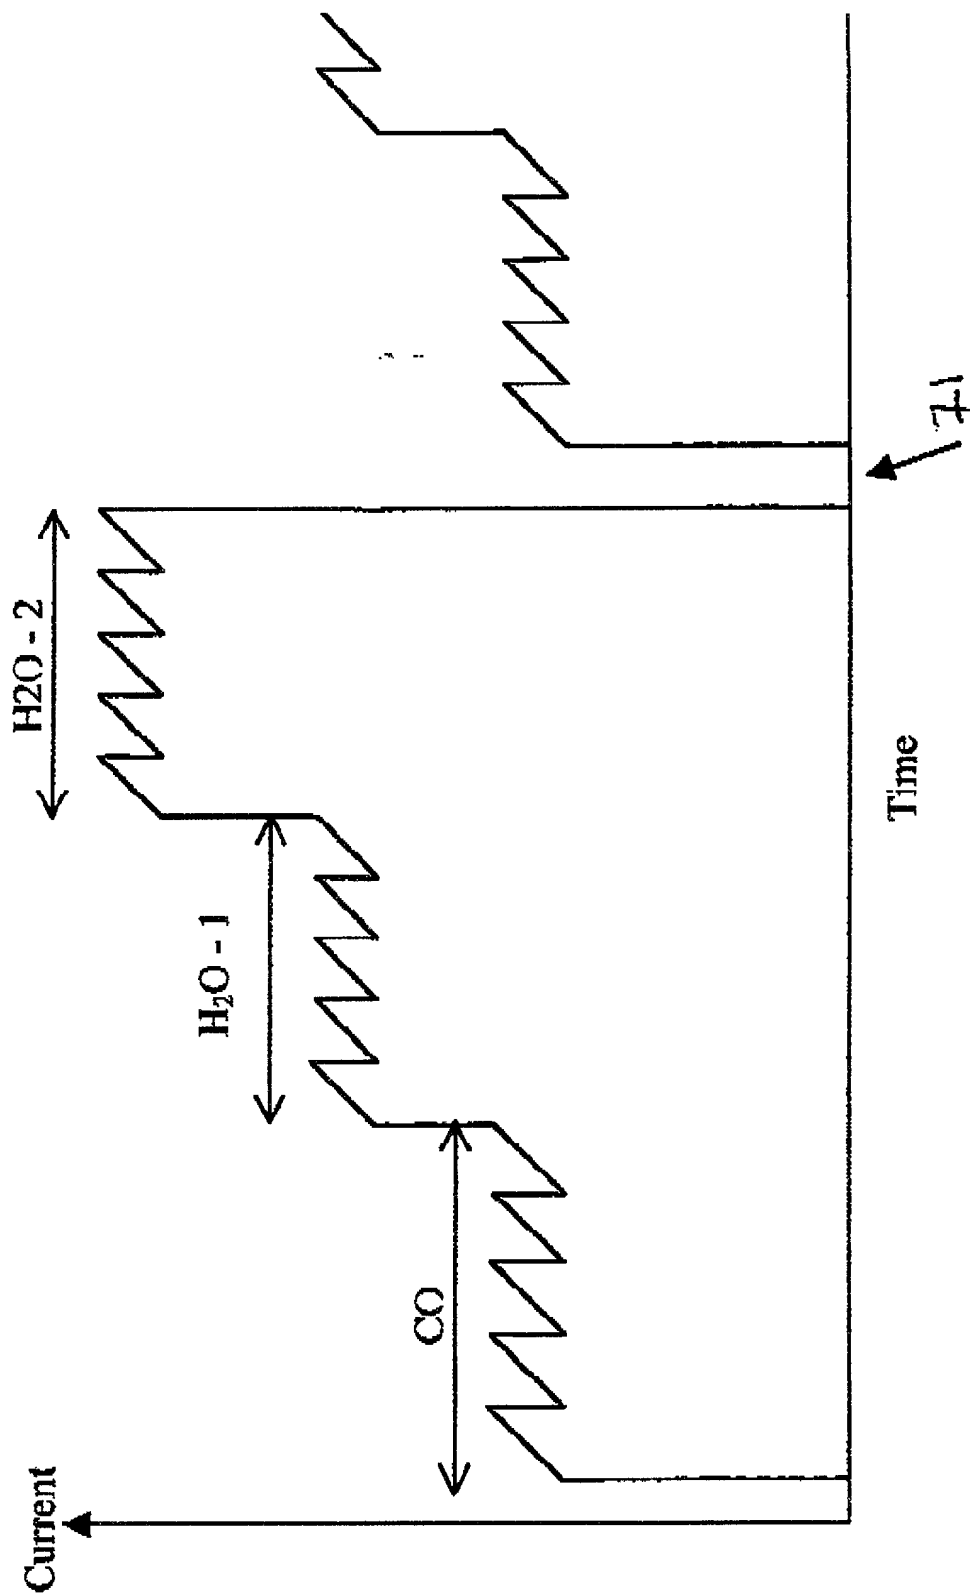


FIGURE 18

TO 3230" AT 300000

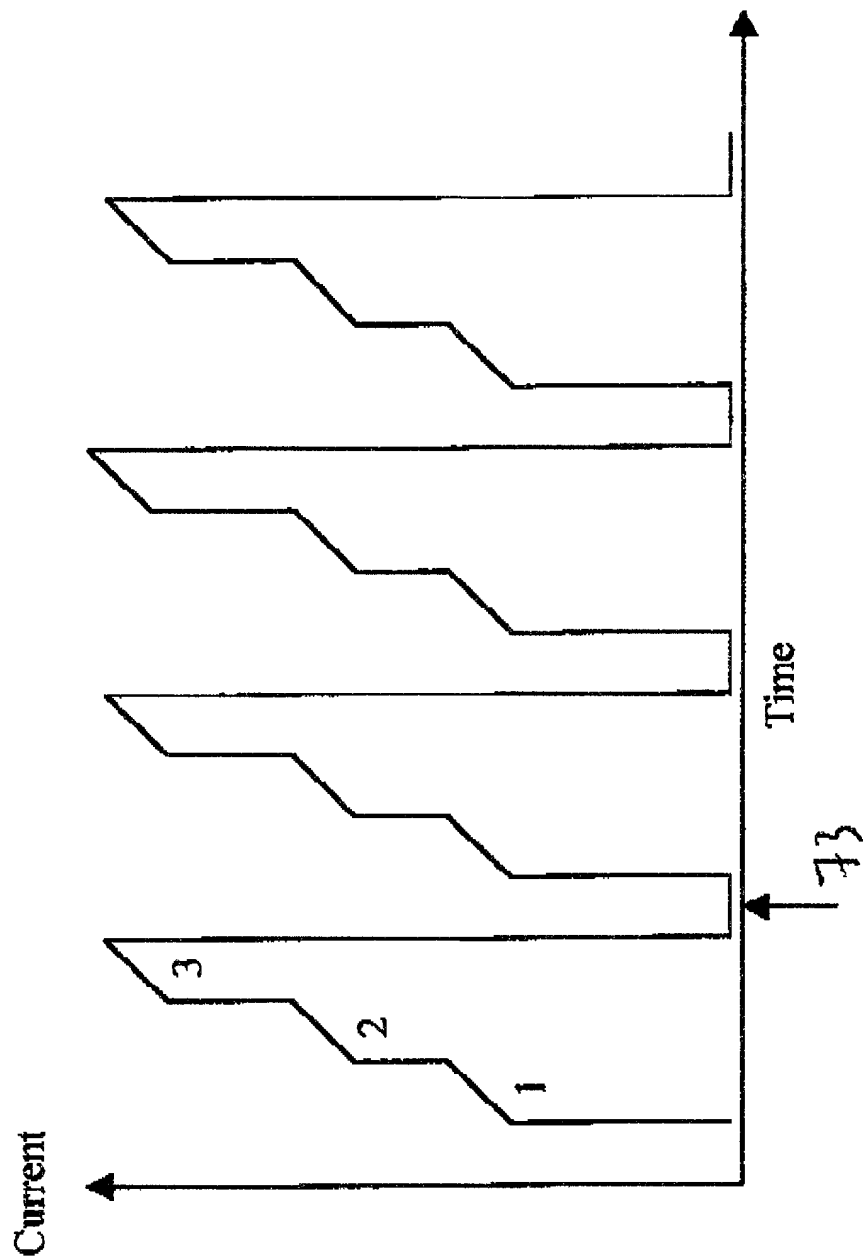


FIGURE 19